

HR-002

Open Hose Reels with Polyurethane Hose

Fixed hose reel, Series 288 for air-water
20 Bar with hose 13 m \varnothing 10 x 14.5 mm

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE |
CLEANING | BUILDING INDUSTRY AND ROAD CONSTRUCTION | MANUFACTURING INDUSTRY

FLUIDS

AIR | WATER | NITROGEN/INFLATING USE


CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)



FEATURES	UM	VALUE
Pressure	Bar	20
Compatible fluids		Air – water
Swivel joint		Brass
Seals		Viton®
Characteristic		Fixed
Material		Painted steel
Couplings		Brass
Hose		972.113
\varnothing and hose length	\varnothing – m	3/8" – 13
Inlet		G 3/8" (m)
Outlet		G 3/8" (m)
Reel flow path		Brass – Nylon PA6
Internal drum width	mm	98

Overall Dimensions

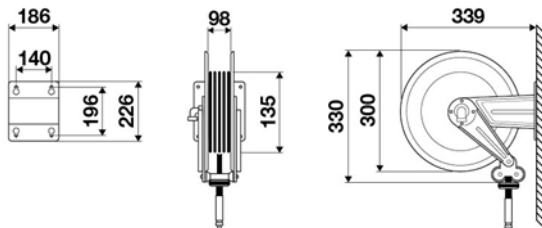

Africa Fuel Projects (PTY) Ltd

58 Charles Road, Glen Donald, Meyerton, 1961

Gauteng, South Africa

+27 (0) 87 285 2463 / 4

sales@afrifuel.com | www.afrifuel.com



Africa
fuelProjects
(PTY) Ltd